


## Standard specification

Main unit		stainless steel
Discharge rate		6.4L/min~15.5L/min
Discharge pressure (Max)		1.4MPa
Direction of rotation (When viewed from the nameplate)		Right
Mass	Pump	6.8kg
	Pump + Motor (Reference)	30kg



## Dimensional diagrams (mm)

■ Without relief valve

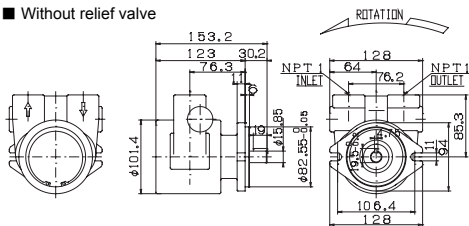

## Performance Table

2600 series Performance table												
The amount of power required for standard discharge in 1450r/min(50Hz).												
Format	Discharge rate(L/min)					Required power(W)						
	Pressure (MPa)					Pressure (MPa)						
	0.35	0.7	1.05	1.4	1.75	0.35	0.7	1.05	1.4	1.75		
3611	35.1	35.0	34.8	34.7	34.5	314	596	878	1164	1474		
3610	33.3	32.9	32.4	32.0	31.7	323	575	855	1132	1438		
3609	29.4	29.2	28.9	28.6	28.3	316	535	816	1060	1242		
3608	26.2	26.0	25.7	25.5	25.2	285	476	725	945	1125		
3607	23.0	22.8	22.5	22.3	22.0	282	437	621	836	1078		
3606	19.8	19.6	19.3	19.1	18.8	252	410	593	780	957		
3605	16.1	15.9	15.6	15.4	15.1	221	345	530	713	892		

2600 series Performance table												
The amount of power required for standard discharge in 1725r/min(60Hz).												
Format	Discharge rate(L/min)					Required power(W)						
	Pressure (MPa)					Pressure (MPa)						
	0.35	0.7	1.05	1.4	1.75	0.35	0.7	1.05	1.4	1.75		
3611	41.8	41.6	41.4	41.3	41.1	373	709	1044	1383	1757		
3610	39.6	39.1	38.6	38.1	37.7	384	685	1018	1347	1711		
3609	35.0	34.7	34.4	34.0	33.7	375	636	970	1261	1479		
3608	31.2	30.9	30.6	30.3	30.0	340	565	864	1112	1343		
3607	27.4	27.1	26.8	26.5	26.2	336	618	740	996	1285		
3606	23.6	23.3	23.0	22.7	22.4	301	487	706	925	1141		
3605	19.2	18.9	18.6	18.3	18.0	262	410	631	849	1064		